


THE WIDE RANGE OF UV - IR TECHNOLOGY



Automatic UV-Power Regulation 1 – 8 *

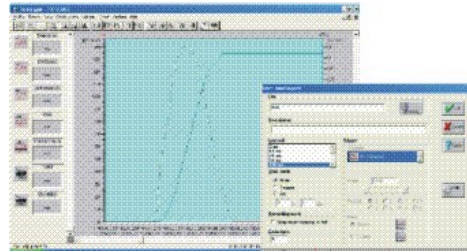

CONSTANT UV-MONITORING
AUTOMATIC UV-POWER REGULATION
IN CASE OF DEVIATION FROM THRESHOLD VALUES
FOR UV-SOURCES AND SYSTEMS, 1 - 8 LAMPS
UV, UV-A, UV-B AND UV-C SENSORS

Radiometric:

Dynamic Range: 0 to 1500 mW/cm²
Display: 0 - 100% or 0 - 1500 mW/cm²
Out of Band Rejection: VIS and IR

Sensors: UV - 250 nm - 410 nm
UV - C 230 nm - 280 nm
UV - B 280 nm - 315 nm
UV - A 315 nm - 410 nm

Electrical / Mechanical:

Line Power: 90 - 230 V AC
Size: 200 mm x 250 mm 60 mm
Weight: 520 grams
Temp. range: 0 to +30 C
Display: LCD 2 x 20 lines
Option: 0 - 10 volt output



- (available in conjunction with continuous UV power control only)