



THE WIDE RANGE OF UV - IR TECHNOLOGY

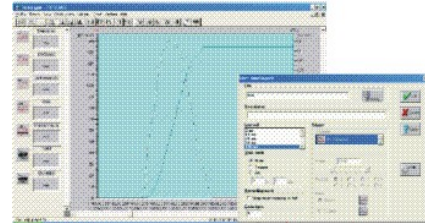

UV-Monitoring Datalog 12

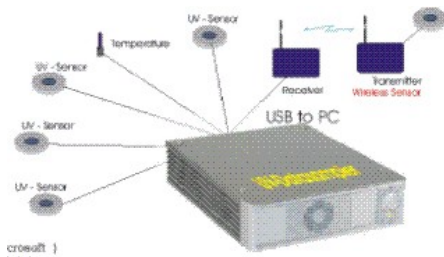

A NEW PORTABLE UV-DATASAMPLER

NEW

FOR UV CURING SYSTEMS, MAX 12 CHANNELS

UV + TEMP. SENSORS PROFILE ANALYZING AND

3D-UV DATA ACQUISITION

Radiometric:
 Dose Range: 0 to 100,000 mJ/cm²
 Dynamic Range: 0 to 1500 mW/cm²
 Sample rate: 0,1 sec. to 1h
 Out of Band Rejection: VIS and IR

Sensors: UV - 250 nm - 410 nm
 UV - C 230 nm - 280 nm
 UV - B 280 nm - 315 nm
 UV - A 315 nm - 410 nm

Temperatur Sensor:
 Range: -0 to +110 C

Electrical / Mechanical:
 Size: 220 mm x 250 mm 60 mm
 Weight: 520 grams

Display: PC-System, USB / RS232
Software: Windows 98, 2000, XP (Microsoft)
 including comfortable datalogger software
 exportable files to EXEL

The Datasampler is running in stand alone and online mode.

