


# THE WIDE RANGE OF UV - IR TECHNOLOGY



## UV-Power Monitoring 1 – 8 Channel

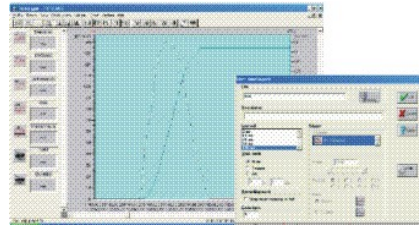

### CONSTANT UV-MONITORING

FOR UV-SOURCES AND SYSTEMS, 1 - 8 CHANNELS

UV, UV-A, UV-B AND UV-C SENSORS

UV-MONITORING AND LEVEL ALARM

#### Radiometric:

Dynamic Range: 0 to 1500 mW/cm<sup>2</sup>  
Display: 0 - 100% or 0 - 1500 mW/cm<sup>2</sup>  
Out of Band Rejection: VIS and IR

Sensors: UV - 250 nm - 410 nm  
UV - C 230 nm - 280 nm  
UV - B 280 nm - 315 nm  
UV - A 315 nm - 410 nm

#### Electrical / Mechanical:

Line Power: 90 - 230 V AC  
Size: 200 mm x 250 mm 60 mm  
Weight: 520 grams  
Temp.range: 0 to +30 C  
Display: LCD 2 x 20 lines  
Option: 0 - 10 volt output



### UV-IR TECHNOLOGY